
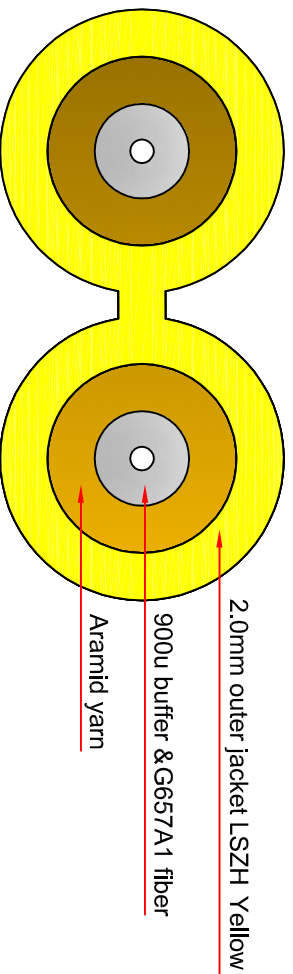


L---L+200mm

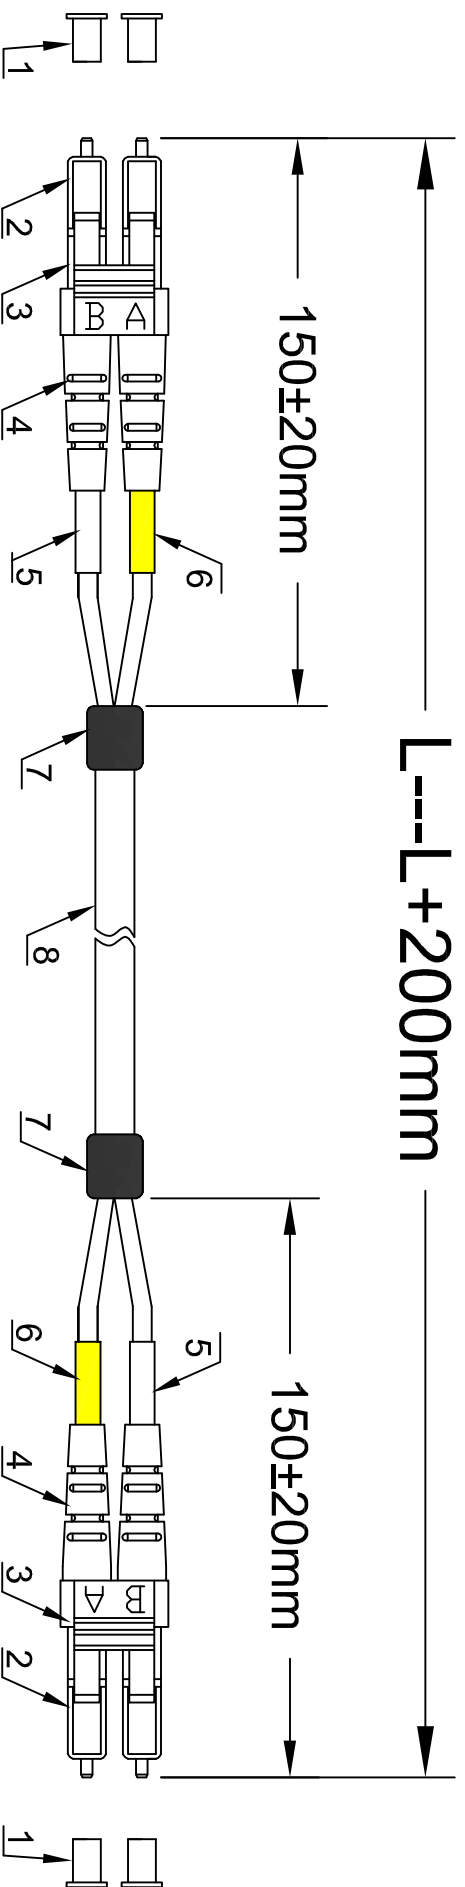

ASSEMBLY	CONNECTIVITY
LC/UPC-1	LC/UPC-2
A	B
B	A

ITEM NO	LENGTH
EL1701	1.00m
EL1702	2.00m
EL1703	3.00m
EL1705	5.00m

**NOTE:**

- 1.Insertion loss :LC/PC<0.25dB   λ: 1310&1550nm  
Return loss :LC/PC≥50dB   λ: 1310&1550nm
- 2.Durability:500 matings
- 3.Operation temperature:-40°C to +85°C
- 4.LC connector according to IEC 61754-20

**ROHS**  
**Compliant**

LC/PC --- LC/PC DX 2.0mm G657A1 LSZH Yellow

ITEM	Description	Q'TY
1	LC dust cover white	4 PCS
2	LC/PC SM simplex connector blue	4 PCS
3	LC clip blue	2 PCS
4	LC 2.0mm short boot white	4 PCS
5	LC heat-shrink tubing white	2 PCS
6	LC heat-shrink tubing yellow	2 PCS
7	Breakout heat-shrink tubing black L=15mm	2PCS
8	OD=2.0mm SM duplex G657A1 9/125 fiber optical cable LSZH Yellow	1 PC

**ewent**  
BY INVENT

Designed by:	Yong Yu	Audit:	Qihua Cheng
Date:	2017-04-08	Approve:	Yong Huang
Unit:	mm	Sheet:	A4
Drawing NO:	SOP-ED-170408-03-V1		