



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/12/22	

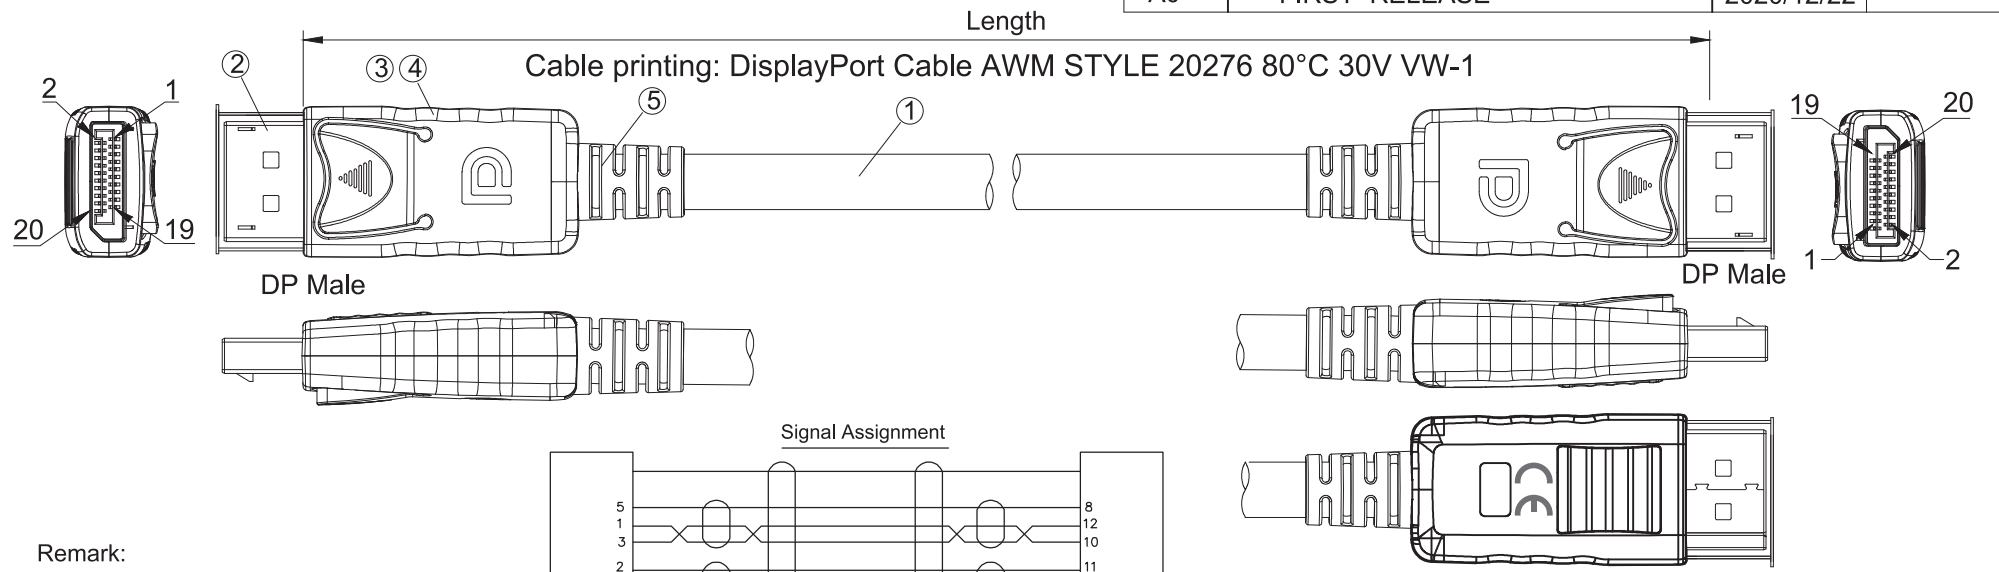

CE
Silk on bottomside:
Pantone Cool Gray 11C
5mm x 6.9mm

Item NO.	Length(m)
EW9812	2.0m

- Remark:
- 100% Open/Short Test
 - Conductive Resistance:15ohms MAX
 - Insulation Resistance:5M ohm MIN.
 - HI-POT:DC 300V/10MS.
 - The product is RoHS compliant.
 - Dp to Dp 1.4V,working as 8K@60Hz,4K@120Hz and 4K@60Hz.

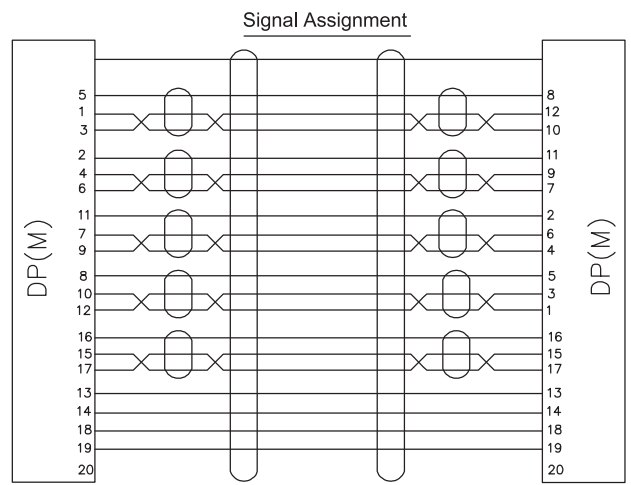

⑤	SR	45P PVC, Black	2PCS	
④	Shell	Top and Bottom Shell, ABS with "D"Black	2SETs	
③	Innernal Mold	Inner Mould PE	2PCS	
②	Connector	DP male head hook, Gold-Plated	2PCS	
①	Cable	DP 1.4V28AWG [(7/0.127TC+FPE)*1P+7/0.127TC+AL]*5C+ (7/0.127TC+HDPE)*4C+AL+D+160/0.12ALB+ PVCOD7.3mmBlack		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

	TOLERANCES UNLESS OTHERWISE STATED
X.	± 1
.X	± 0.2
.XX	± 0.1

ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	Dp to Dp Cable, DP1.4	PAGE NO	1/1
		DATE	2020/12/22
APPROVAL	CHECKED	DRAWN	