
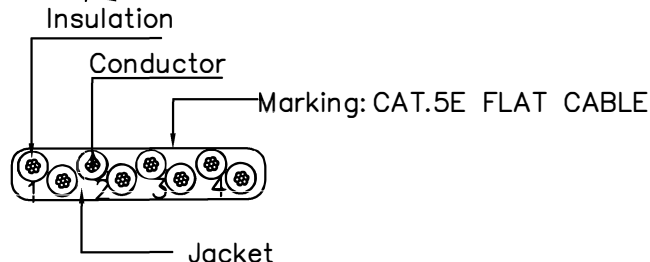


RoHS COMPLIANT

DATE	REV.	REVISION	DRAFTING	CHECKED
	A/0			

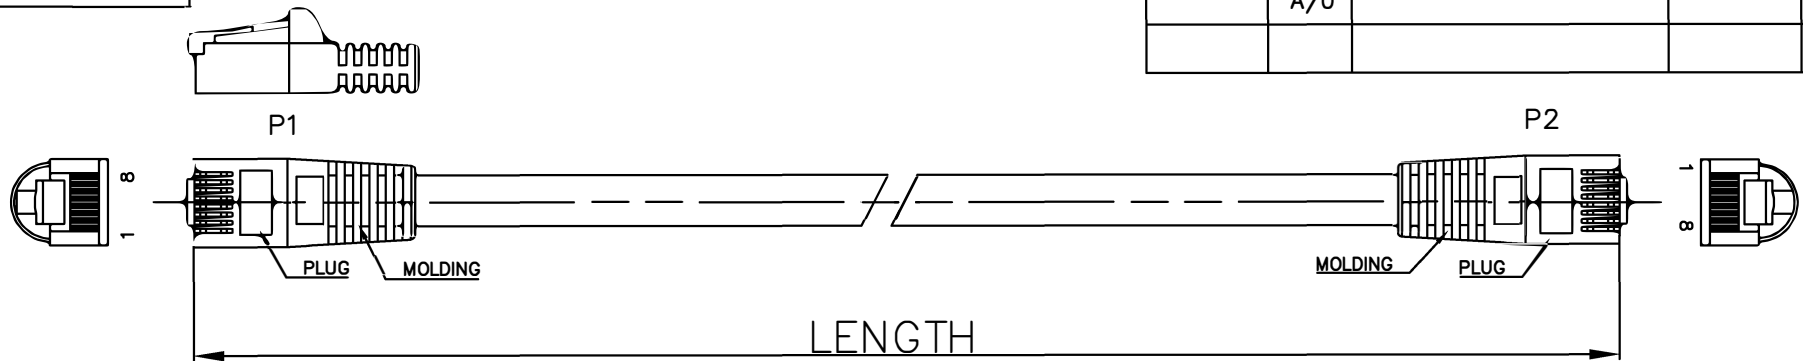

orange 1 / green 2 / blue 3 / brown 4
 white/orange / white/green / white/blue / white/brown

no.	item	length(mm)	tolerance(mm)
1	IM5001	1000	±15
2	IM5002	2000	±15
3	IM5003	3000	+15/-20
4	IM5005	5000	±20
5	IM5010	10000	+40/-20
6	IM5015	15000	+50/-20
7	IM5051	1500	±45

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 32AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.54±0.01mm
Jacket	PVC Thickness:MIN at any point:0.20mm MAX AVG:0.58mm Diameter:5.8*1.6±0.1mm

Wire	FLAT UTP STR 32AWG*4P
Plug	YU-21 8P8C 50U"
Length	XXM
Jacket color	white(RAL NO. 9016)

Unless specified on the drawing, tolerances are per the follows:
 .X ± 1
 .XX ± 0.2
 .XX ± 0.05



e'went <small>by eminent</small>					
DRAW.NO	L-333	ITEM			
DEPARTMENT		DRAW	DHY	DATE	2012/04/05
SCALE		CHECKER	wuxiao	DATE	2012/04/05
UNIT	MM	SHEET	1	OF	1